


## Micro OSD v2

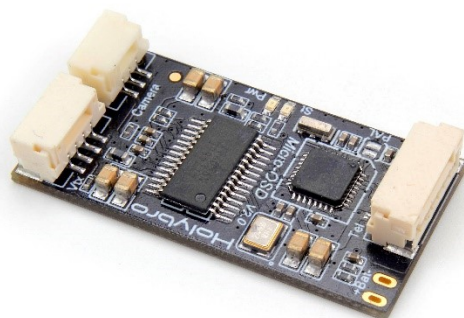

### Specifications:


- ATmega328P with Arduino bootloader
- MAX7456 monochrome on-screen display
- Standard 6-pin ISP header
- Solder jumper for PAL video option
- Exposed test points for HSYNC and LOS
- Dimensions: 17.5\*35mm
- Weight: 3g

Note: BAT+ is directly connected with VTx and Camera (Pay attention to the max with stand voltage of your equipment)


### Included:

- Micro OSD \* 1
- GH 6P cable \* 1
- GH 4P cable \* 1
- GH 3P cable \* 1

### PINMAP

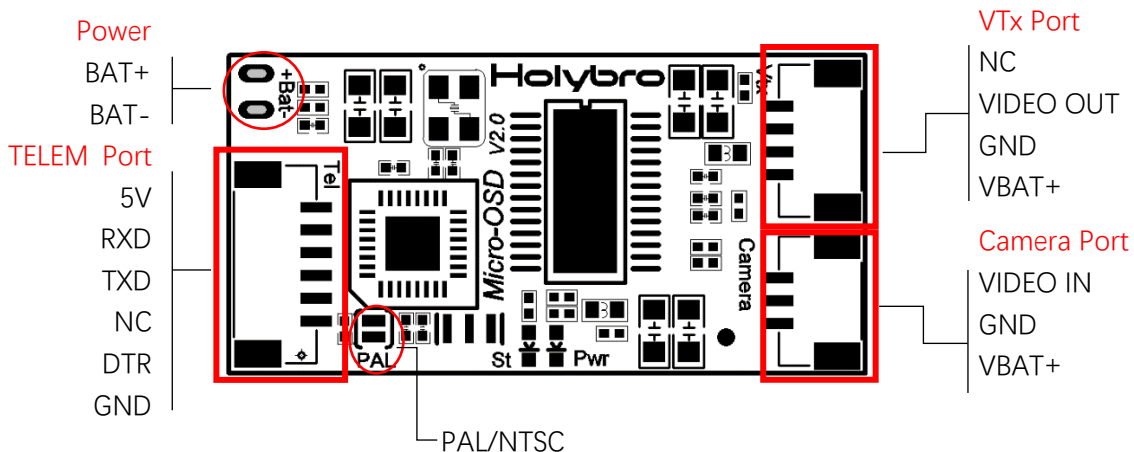

## Connection

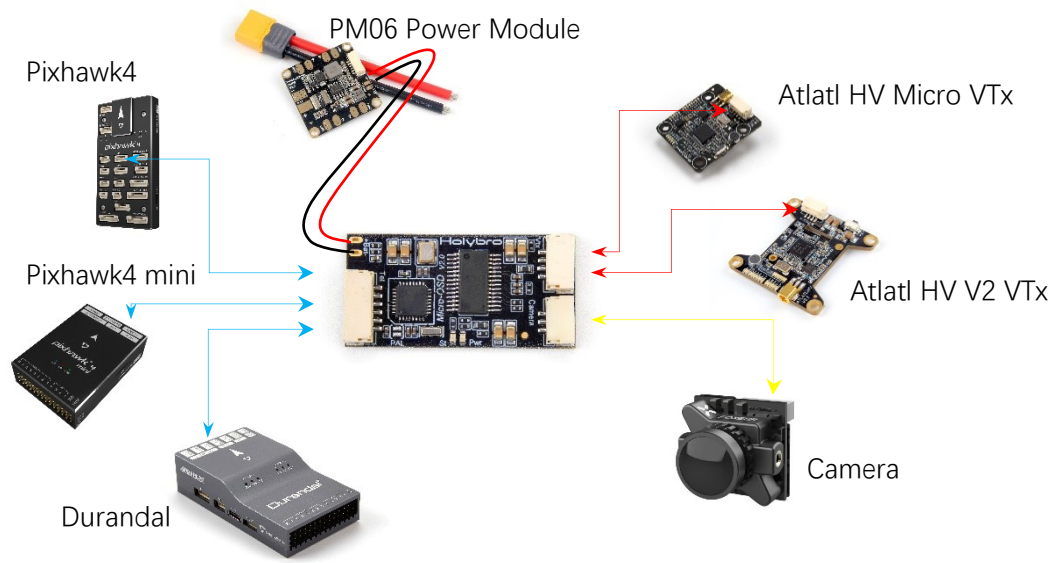

Holybro is a registered trademark of Holybro, registered in the U.S. and other countries.

©Copyright 2018 Holybro. All Rights Reserved.